


Cal. 4219A

Characteristics

Casing diameter : ϕ 23.4 mm
 Maximum height : 5.6 mm
 Vibration per hour : 21,600
 Calendar (Day & Date)
 Instant setting device for day & date calendar
 Automatic and hand winding with sweep second
 Bilingual change-over system for day of the week
 "Diashock" Shock resistant device

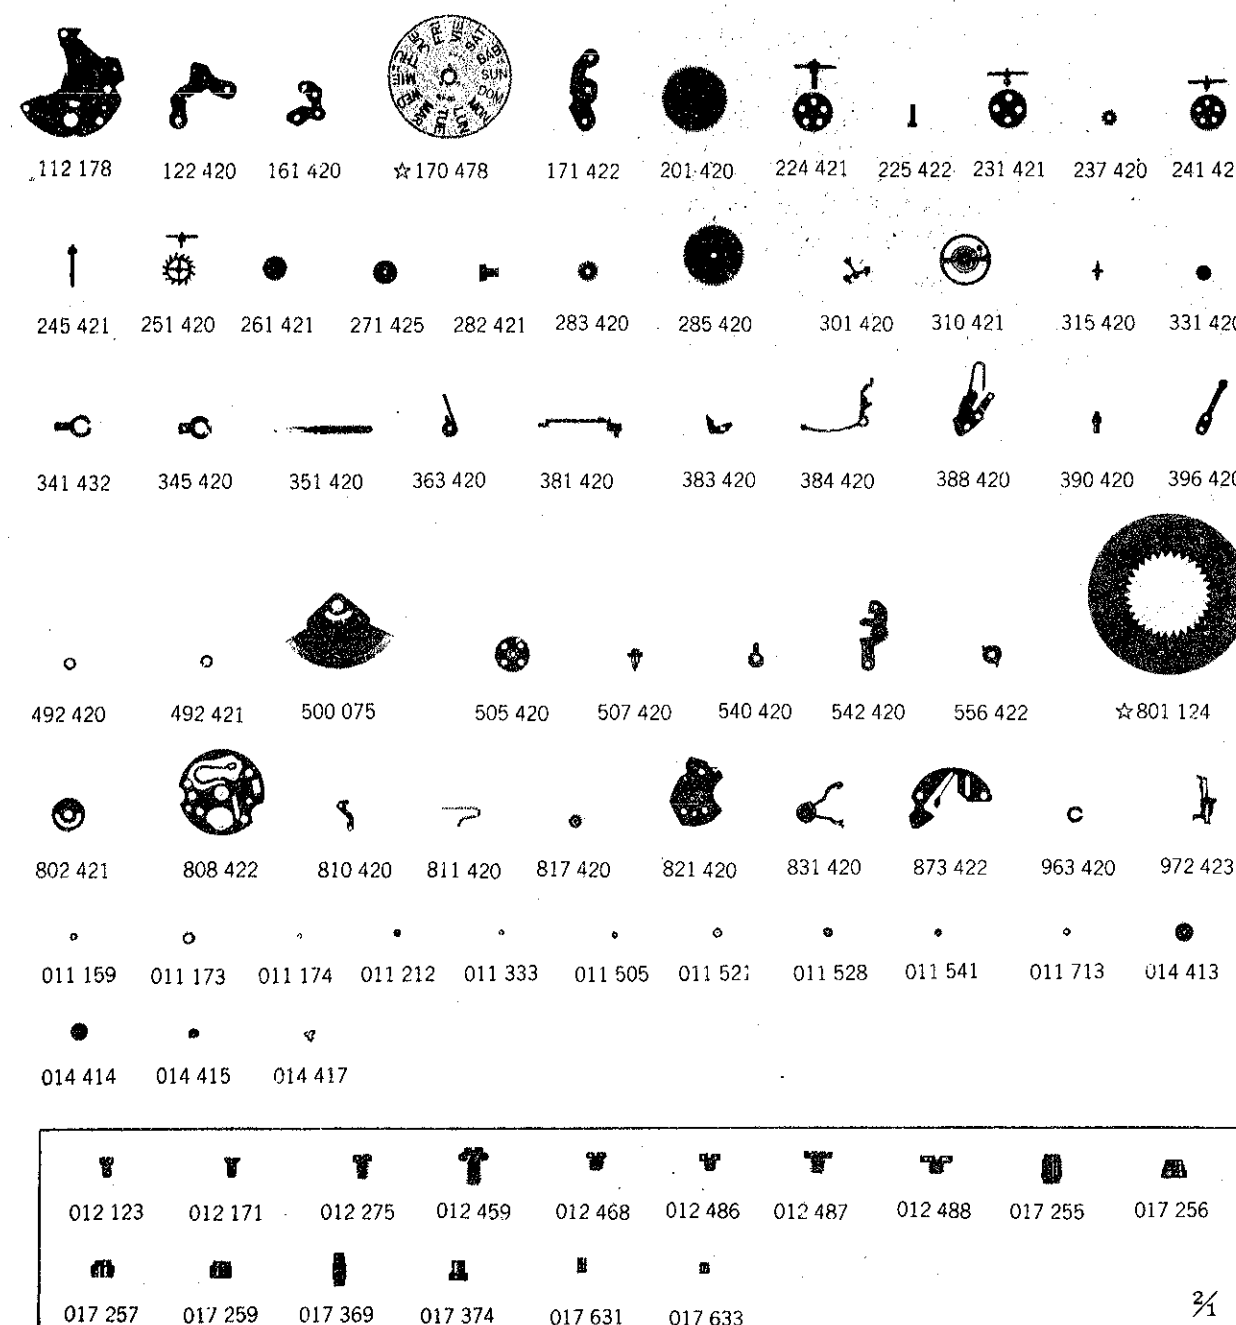

Catalog No.

Calibre No.	Jewels	Style Name	
4219A	23j		
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
112 178 122 420 161 420 ☆170 478 171 422 201 420 224 421 225 422 231 421 237 420 241 421 245 421 251 420 261 421 271 425 282 421 283 420 285 420 301 420 310 421 315 420 331 420 341 432 345 420 351 420 363 420 381 420 383 420 384 420 388 420 390 420 396 420 492 420 492 421 500 075 505 420 507 420 540 420 542 420 556 422 ☆801 124 ☆801 305 ☆801 306 ☆801 307 802 421 808 422 810 420 811 420 817 420 821 420 831 420 873 422 963 420 972 423 011 159 011 173 011 174 011 212 011 333 011 505 011 521 011 528 011 541 011 713 014 414 014 415 014 417	Barrel & train wheel bridge Center wheel bridge Pallet cock Day star with dial disk Balance cock Complete barrel with arbor & main spring Center wheel with cannon pinion Cannon pinion Third wheel & pinion Ratchet intermediate wheel Fourth wheel & pinion Sweep second pinion Escape wheel & pinion Minute wheel Hour wheel Clutch wheel Winding pinion Ratchet wheel Jewelled pallet fork & staff Balance complete with stud Balance staff Roller with jewel Regulator Stud holder Winding stem Sliding crown wheel spring Click Setting lever Yoke (Cluth lever) Setting lever spring Setting lever axle Friction spring for sweep second pinion Balance cock washer (0.015 mm thickness, Gold) Balance cock washer (0.028 mm thickness, Silver) Oscillating weight Transmission wheel Transmission pinion Dial leg holder Rocking seat for idle wheel Date finger Date dial Date driving wheel Date dial guard Date jumper Date jumper spring Intermediate date wheel Ball-bearing for oscillating weight Pawl lever with jewel Day jumper Snap for day star with dial disk Day-date corrector finger Upper hole jewel for barrel & train wheel bridge	011 159 011 173 011 174 011 212 011 212 011 333 011 333 011 505 011 505 011 521 011 521 011 528 011 528 011 541 011 541 011 713 012 123 012 171 012 275 012 275 012 275 012 275 012 459 012 468 012 468 012 468 012 468 012 468 012 486 012 487 012 488 012 488 014 413 014 414 014 415 014 415 014 417 014 417 017 255 017 256 017 257 017 259 017 369 017 374 017 631 017 631 017 631 017 633 017 633 017 633	Lower hole jewel for barrel & train wheel bridge Upper hole jewel for transmission pinion Lower hole jewel for transmission pinion Diashock upper cap jewel Diashock lower cap jewel Upper hole jewel for third wheel Lower hole jewel for third wheel Upper hole jewel for pallet Upper hole jewel for center wheel Lower hole jewel for center wheel Upper hole jewel for escape wheel Lower hole jewel for escape wheel Upper hole jewel for fourth wheel Lower hole jewel for fourth wheel Lower hole jewel for sweep second pinion Stud screw Day jumper screw Barrel & train wheel bridge screw Balance cock screw Setting lever spring screw Screw for rocking seat for idle wheel Case screw Center wheel bridge screw Pallet cock screw Date driving wheel screw Date dial guard screw Screw for ball-bearing complete Transmission wheel screw Screw for oscillating weight Diashock upper frame Diashock lower frame Diashock upper hole jewel with frame Diashock lower hole jewel with frame Diashock upper spring Diashock lower spring Tube for center wheel bridge screw (B) Tube for date driving wheel Tube for dial guard (A) Tube for dial guard (B) Tube for pallet cock screw (A) Dial leg holder pin Tube for barrel & train wheel bridge screw Tube for balance cock screw Tube for rocking seat for idle screw Tube for center wheel bridge screw (A) Tube for pallet cock screw (B)

☆ ⇨ Please see remarks on the reverse page.

☆ ⇨ Please see remarks on the next page. Items in light letters are not shown in photos.

Calibre No. 4219A	Jewels 23j	Style Name
-----------------------------	----------------------	------------

Remarks :

Day star with dial disk

☆170 478(English-Spanish, black figures on white background).....

Used when both the crown and the calendar frame are located 3 o'clock position.
If any other type of day star with dial disk is required, specify the number printed on the disk.

Date dial

☆801 124(Black figures on white background) } Used when both the crown and the calendar frame
 ☆801 305(White figures on black background) } are located at 3 o'clock position
 ☆801 306(Black figures on white background) } Used when the crown are located at 3 o'clock
 ☆801 307(White figures on black background) } position and the calendar frame at 6 o'clock position.

If any other type of date dial is required, specify ① Cal. No. ② Jewels ③ The crown position ④ The calendar frame position and ⑤ Dial No.