





**Characteristics**  
 Casing diameter: 25.60<sup>φ</sup> mm  
 Maximum height: 4.50 mm  
 Vibrations per hour: 28,800  
 Automatic and auxiliary hand winding with sweep second  
 Calendar (day & date)  
 Instant setting device for day & date calendar  
 Bilingual change-over system for day of week  
 Second-setting device  
 Outside micro-adjusting device  
 "Diashock" Shock Resistant Device  
 "Diafix" Oil Lubrication Device

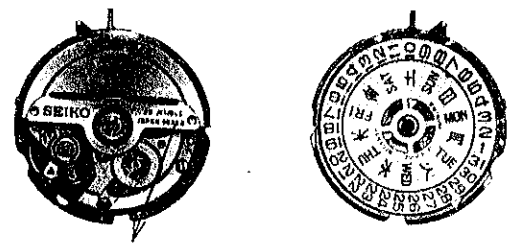

Cal. 5626A

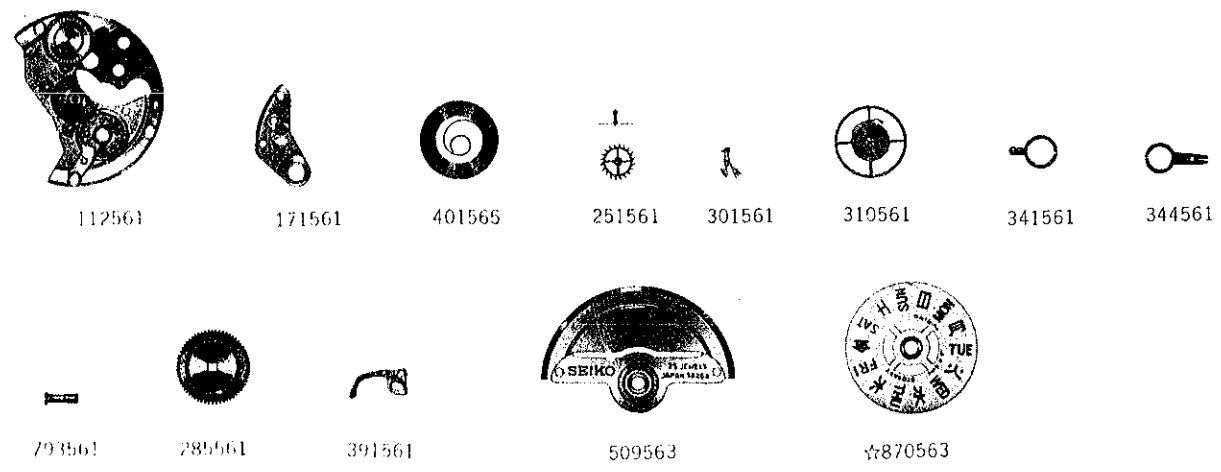

Catalog No.

Calibre No. <b>5626A</b>		Jewels <b>25j</b>	Style Name
⇨ Basic Calibre <b>5606A</b> <sup>23J</sup> / <sub>25J</sub> Catalog No. 56-06-1			
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
<b>112561</b>	<b>Barrel &amp; train-wheel bridge</b>	868560	Day finger
161560	Pallet cock	☆ <b>870563</b>	<b>Day star with dial disk</b>
<b>171561</b>	<b>Balance cock</b>	873560	Day jumper
189560	Transmission wheel bridge	☆ 884560	Holding ring for dial
205560	Complete barrel with arbor	963610	Snap for day star with dial disk
213560	Barrel arbor	981560	Day-date corrector wheel rocker
220560	Large driving wheel & pinions	986560	Day-date corrector wheel rocking lever
225560	Cannon pinion	987560	Day-date corrector wheel rocking lever spring
231560	Third wheel & pinion		
241560	Sweep second wheel & pinion	989560	Intermediate wheel for day correction
<b>251561</b>	<b>Escape wheel &amp; pinion</b>	022150	Stud screw
261560	Minute wheel	022252	Transmission wheel bridge screw
271611	Hour wheel	022257	Screw for day-date corrector wheel rocking lever spring
282560	Clutch wheel		
283560	Winding pinion	022373	Pallet cock screw
<b>285561</b>	<b>Ratchet wheel</b>	022454	Screw for reverser idler bolt
<b>301561</b>	<b>Jewelled pallet fork &amp; staff</b>	022458	Screw for oscillating weight
<b>310561</b>	<b>Balance complete with stud</b>	022467	Ratchet wheel screw
315560	Balance staff	022482	Screw for intermediate wheel of day correction
331560	Roller with jewel		
<b>341561</b>	<b>Regulator</b>	022484	Bridge screw
<b>344561</b>	<b>Regulator adjusting device</b>	022486	Minute wheel bridge screw
345612	Stud holder	022662	Setting lever spring screw
354560	Winding stem	022667	Second-setting lever screw
361560	Second-setting lever spring	022673	Screw for day & date driving wheel
367560	Minute wheel spring	022674	Screw for day-date corrector wheel rocking lever
381560	Click		
☆ 383560		022753	Date dial guard screw
☆ 383561	Setting lever	022753	Day jumper screw
☆ 383562		022761	Dial screw
384560	Yoke (Clutch lever)	011123	Upper hole jewel for barrel
385560	Yoke spring (Clutch lever spring)	011142	Lower hole jewel for barrel
387560	Minute wheel bridge	011147	Upper hole jewel for large driving wheel & pinions
388560	Setting lever spring		
390560	Setting lever axle	011147	Lower hole jewel for large driving wheel & pinions
<b>391561</b>	<b>Second-setting lever</b>		
<b>401565</b>	<b>Mainspring with slipping attachment</b>	011323	Lower hole jewel for 3rd wheel
<b>793561</b>	<b>Micro-adjusting axle</b>	011423	Lower hole jewel for escape wheel
014363	Diashock upper frame	011503	Upper hole jewel for pallet
014384	Diashock lower frame	011503	Lower hole jewel for pallet
014365	Diashock hole jewel with frame	011147	Lower hole jewel for 1st reverser idler
011210	Diashock cap jewel	011151	Upper hole jewel for differential wheel
014317	Diashock spring	011133	Lower hole jewel for differential wheel
015421	Diafix upper hole jewel with frame for 3rd wheel	011159	Upper hole jewel for transmission wheel
		011159	Lower hole jewel for transmission wheel
015411	Diafix upper hole jewel with frame for escape wheel	023179	Tube for minute wheel bridge screw
		023180	Tube for bridge screw (Cylinder type)
011206	Diafix cap jewel	023184	Tube for bridge screw (Recessed type)
015113	Diafix spring		
<b>509563</b>	<b>Oscillating weight with ball-bearing</b>		
505560	Transmission wheel		
531560	Differential wheel		
848560	First reverser idler		
851560	Second reverser idler		
854560	Reverser idler bolt		
☆ 801560	Date dial		
802560	Date driving wheel		
803560	Setting wheel lever complete		
808560	Date dial guard		
810560	Date jumper		
812560	Setting wheel lever spring		
817610	Intermediate date wheel		

☆ ⇨ Please see remarks on the next page.  
 As for all other parts not shown here, please refer to the basic calibre (Cal. No. **5606A** <sup>23J</sup>/<sub>25J</sub> Catalog No. 56-06-1 Green page).

☆ ⇨ Please see remarks on the next page.  
 Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre (Cal. No. **5606A** <sup>23J</sup>/<sub>25J</sub> Catalog No. 56-06-1 Green page).


Calibre No.	<b>5626A</b>	Jewels	<b>25 j</b>	Style Name
Basic Calibre 5606A <sup>23j</sup> / <sub>25j</sub> Catalog No. 56-06-1				

**Remarks :**

**Setting lever**

There are three types of setting levers, used according to the dial diameter. Select the suitable setting lever by referring to the shapes indicated in fig. 1.


When a setting lever unsuitable for the dial diameter is used, the winding stem cannot be pulled out or the movement cannot be assembled in the case. Pay attention to this point (refer to fig. 2).

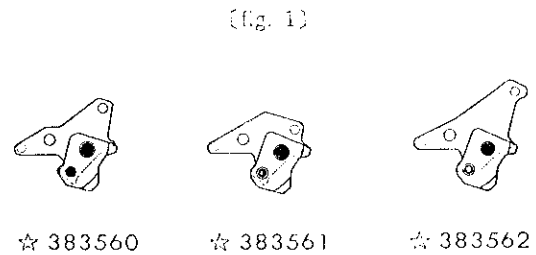

When the dial is round, the number of the setting lever differs (listed below) according to the dial diameter.

- (Dial diameter) 25.5 ~ 26.5 φmm ..... ☆ 383561
- ( " ) 27.5 ~ 28.5 φmm ..... ☆ 383560
- ( " ) 29.5 ~ 30.5 φmm ..... ☆ 383562

If the number of the setting lever is unknown or when placing an order for a setting lever other those mentioned above, specify (1) Cal. No. and (2) the dial No.

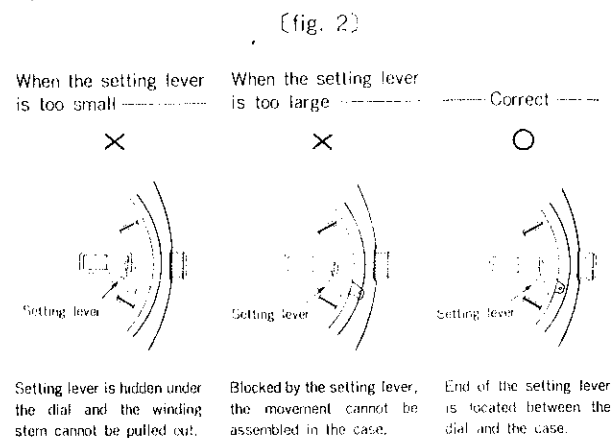

**Date dial**

☆ 801560 ..... Used when both the crown and the date frame are located at 3 o'clock.

If the date dial is required in any other type, specify (1) Cal. No. (2) the crown position (3) the date frame position and (4) the dial No.

**Day star with dial disk**

☆ 870563 ..... Used when both the crown and the day frame are located at 3 o'clock.

When ordering any other type of the day star with dial disks, clearly mention the number printed on the disk. If the number is unknown, specify (1) Cal. No. (2) the crown position (3) the day frame position (4) the dial No. and (5) the national language.

**Holding ring for dial** ----- Measure the total thickness and the outside diameter -----

☆ 884560 ..... 0.53mm total thickness and 27.0 φmm outside diameter.

If the holding ring for dial is required in any other type, specify (1) Cal. No. and (2) the dial No.