



Cal. 5626B




### Characteristics


Casing diameter: 25.60  $\phi$  mm  
 Maximum height: 4.50 mm  
 Vibrations per hour: 28,800  
 Automatic and auxiliary hand winding with sweep second  
 Calendar (day & date)  
 Instant setting device for day & date calendar  
 Bilingual change-over system for day of week  
 Second-setting device  
 Micro-adjustor  
 "Diashock" Shock Resistant Device  
 "Diafix" Oil Lubrication Device




112 561




161 561




171 562




251 561




285 561




301 561




310 561




341 564




344 562




391 561



401 565



509 573



☆ 870 563

Catalog No.

Calibre No.	<b>5626B</b>	Jewels	Style Name
⇨ Basic Calibre <b>5606A</b> <sup>23J</sup> / <sub>25J</sub> Catalog No. 56-06-1		<b>25j</b>	
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
<b>112 561</b>	<b>Barrel &amp; train-wheel bridge (with crown wheel)</b>	011 123	Upper hole jewel for barrel
<b>161 561</b>	<b>Pallet cock</b>	011 133	Lower hole jewel for differential wheel
<b>171 562</b>	<b>Balance cock (with micro-adjustor pin)</b>	011 142	Lower hole jewel for barrel
189 560	Transmission wheel bridge	011 147	Upper hole jewel for large driving wheel & pinions
205 560	Complete barrel with arbor	011 147	Lower hole jewel for large driving wheel & pinions
213 560	Barrel arbor	011 147	Lower hole jewel for 1st reverser idler
220 560	Large driving wheel & pinions	011 151	Upper hole jewel for differential wheel
225 560	Cannon pinion	011 159	Upper hole jewel for transmission wheel
231 560	Third wheel & pinion	011 159	Lower hole jewel for transmission wheel
241 560	Sweep second wheel & pinion	011 323	Lower hole jewel for 3rd wheel
<b>251 561</b>	<b>Escape wheel &amp; pinion</b>	011 423	Lower hole jewel for escape wheel
261 560	Minute wheel	011 503	Upper hole jewel for pallet
271 611	Hour wheel	011 503	Lower hole jewel for pallet
282 560	Clutch wheel	014 363	Diashock upper frame
283 560	Winding pinion	014 384	Diashock lower frame
<b>285 561</b>	<b>Ratchet wheel</b>	014 365	Diashock hole jewel with frame
<b>301 561</b>	<b>Jewelled pallet fork &amp; staff</b>	011 210	Diashock cap jewel
<b>310 561</b>	<b>Balance complete with stud</b>	014 317	Diashock spring
315 560	Balance staff	015 421	Diafix upper hole jewel with frame for 3rd wheel
331 560	Roller with jewel	015 411	Diafix upper hole jewel with frame for escape wheel
<b>341 564</b>	<b>Regulator</b>	011 206	Diafix cap jewel
<b>344 562</b>	<b>Regulator adjusting device</b>	015 113	Diafix spring
345 612	Stud holder	022 150	Stud screw
354 560	Winding stem	022 252	Transmission wheel bridge screw
361 560	Second-setting lever spring	022 257	Screw for day-date corrector wheel rocking lever spring
367 560	Minute wheel spring	022 373	Pallet cock screw
381 560	Click	022 454	Screw for reverser idler bolt
☆ 383 560	Setting lever	022 458	Screw for oscillating weight
☆ 383 561		022 467	Ratchet wheel screw
☆ 383 562	Yoke (Clutch lever)	022 482	Screw for intermediate wheel of day correction
384 560		022 484	Bridge screw
385 560	Yoke spring (Clutch lever spring)	022 486	Minute wheel bridge screw
387 560	Minute wheel bridge	022 662	Setting lever spring screw
388 560	Setting lever spring	022 667	Second-setting lever screw
390 560	Setting lever axle	022 673	Screw for day & date driving wheel
<b>391 561</b>	<b>Second-setting lever</b>	022 674	Screw for day-date corrector wheel rocking lever
<b>401 565</b>	<b>Mainspring with slipping attachment</b>	022 753	Date dial guard screw
505 560	Transmission wheel	022 753	Day jumper screw
<b>509 573</b>	<b>Oscillating weight with ball-bearing</b>	022 761	Dial screw
531 560	Differential wheel	023 179	Tube for minute wheel bridge screw
☆ 801 560	Date dial	023 180	Tube for bridge screw (Cylinder type)
802 560	Date driving wheel	023 184	Tube for bridge screw (Recessed type)
803 560	Setting wheel lever complete		
808 560	Date dial guard		
810 560	Date jumper		
812 560	Setting wheel lever spring		
817 610	Intermediate date wheel		
848 560	First reverser idler		
851 560	Second reverser idler		
854 560	Reverser idler bolt		
868 560	Day finger		
☆ <b>870 563</b>	<b>Day star with dial disk (English ↔ Japanese)</b>		
873 560	Day jumper		
☆ 884 560	Holding ring for dial		
963 610	Snap for day star with dial disk		
981 560	Day-date corrector wheel rocker		
986 560	Day-date corrector wheel rocking lever		
987 560	Day-date corrector wheel rocking lever spring		
989 560	Intermediate wheel for day correction		

☆⇨ Please see remarks on the next page.

As for all other parts not shown here, please refer to the basic calibre

(Cal. No. **5606A** <sup>23J</sup>/<sub>25J</sub> Catalog No. 56-06-1 Green page).

☆⇨ Please see remarks on the next page.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre

(Cal. No. **5606A** <sup>23J</sup>/<sub>25J</sub> Catalog No. 56-06-1 Green page).

Calibre No.	<b>5626B</b>	Jewels	<b>25j</b>	Style Name
Basic Calibre 5606A <sup>23J</sup> / <sub>25J</sub> Catalog No. 56-06-1				

**Remarks :**

**Setting lever**

There are three types of setting levers, used according to the dial diameter. Select the suitable setting lever by referring to the shapes indicated in fig. 1.

When a setting lever unsuitable for the dial diameter is used, the winding stem cannot be pulled out or the movement cannot be assembled in the case. Pay attention to this point (refer to fig. 2).

When the dial is round, the number of the setting lever differs (listed below) according to the dial diameter.


- (Dial diameter) 25.5~26.5  $\phi$  mm ..... ☆383 561
- ( " ) 27.5~28.5  $\phi$  mm ..... ☆383 560
- ( " ) 29.5~30.5  $\phi$  mm ..... ☆383 562

If the number of the setting lever is unknown or when placing an order for a setting lever other those mentioned above, specify ① Cal. No. and ② the dial No.

(fig. 1)



(fig. 2)

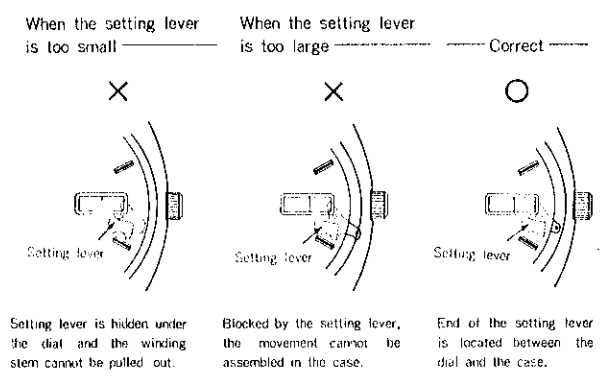

**Date dial**

☆801 560.....Used when both the crown and the date frame are located at **3 o'clock**.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

**Day star with dial disk**

☆870 563 (English ↔ Japanese).....Used when both the crown and the day frame are located at **3 o'clock**.

When ordering any other type of the day star with dial disks, clearly mention the number printed on the disk. If the number is unknown, specify ① Cal. No. ② the crown position ③ the day frame position ④ the dial No. and ⑤ the national language.

**Holding ring for dial** ----- Measure the total thickness and the outside diameter -----

☆884 560 ..... 0.53 mm total thickness and 27.0  $\phi$  mm outside diameter.

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.