


Catalog No.



Cal. 6106C

Characteristics

Casing diameter: 27.00 ϕ mm
 Maximum height: 5.15 mm
 Vibrations per hour: 21,600
 Automatic winding with sweep second
 Calendar (day & date)
 Instant setting device for day & date calendar
 Bilingual change-over system for day of week
 Second-setting device
 "Diashock" Shock Resistant Device
 "Diafix" Oil Lubrication Device

112522

112524

171612

231617

251613

301612

261615

341612

345612

387613

015421

015411

011206

015113

015450

☆357612

☆998613

☆999611

193526

193531

500620

823619

556611

802611

808611

810611

868611

880611

972610

☆870558

022269

022458

022493

022761

Calibre No.	Jewels	Style Name	
6106C	23j 25j		
⇨ Basic Calibre 6106A 25J Catalog No. 61-06-1			
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
112522	Barrel & train-wheel bridge (for 25j)	015450	Diafix lower hole & cap jewel with frame for pallet (for 25j)
112524	Barrel & train-wheel bridge (for 23j)	500620	Oscillating weight
122611	Center wheel bridge	505611	Transmission wheel
161805	Pallet cock	823619	Eccentric post
171611	Balance cock (for 25j)	831611	Pawl lever with jewel
171612	Balance cock (for 23j)	839610	Holder for transmission wheel & pawl lever
193526	Framework for automatic device with ball-bearing (for 25j)	556611	Date finger
		☆801610	Date dial
193531	Framework for automatic device with ball-bearing (for 23j)	802611	Date driving wheel
		808611	Date dial guard
205613	Complete barrel with arbor	810611	Date jumper
213612	Barrel arbor	817610	Intermediate date wheel
224611	Center wheel & pinion with cannon pinion	868611	Day finger
225611	Cannon pinion	☆870558	Day star with dial disk (English ⇔ Spanish)
231617	Third wheel & pinion	880611	Date corrector
241611	Sweep second wheel & pinion	883610	Date corrector spring
251613	Escape wheel & pinion	☆884611	Holding ring for dial
261611	Minute wheel (for 23j)	963610	Snap for day star with dial disk
261615	Minute wheel (for 25j)	972610	Day-date corrector finger
271611	Hour wheel	022150	Stud screw
281611	Setting wheel	022252	Holder screw for transmission wheel & pawl lever
282611	Clutch wheel	022257	Date corrector spring screw
285611	Ratchet wheel	022269	Minute wheel bridge screw (Cheese-head screw)
301611	Jewelled pallet fork & staff (for 23j)	022351	Center wheel bridge screw
301612	Jewelled pallet fork & staff (for 25j)	022458	Screw for oscillating weight
310611	Balance complete with stud	022467	Ratchet wheel screw
315611	Balance staff	022468	Pallet cock screw
331610	Roller with jewel	022470	Framework screw for automatic device with ball-bearing
341611	Regulator (for 25j)		Click screw
341612	Regulator (for 23j)	022471	Click screw
345612	Stud holder	022493	Bridge screw
☆354615	Winding stem	022662	Setting lever spring screw
☆357612		022677	Screw for day & date driving wheel
381611	Click	022760	Minute wheel bridge screw (Chamfer-head screw)
383611	Setting lever	022760	Date dial guard screw
384611	Yoke (Clutch lever)	022761	Dial screw
387613	Minute wheel bridge	011145	Upper hole jewel for center wheel
388611	Setting lever spring	011146	Lower hole jewel for center wheel
391610	Second-setting lever	011306	Upper hole jewel for sweep second wheel
☆397610	Lever for unlocking stem	011503	Upper hole jewel for pallet
401615	Mainspring with slipping attachment	011503	Lower hole jewel for pallet (for 23j)
☆998613	Indicator wheel	011701	Hole jewel for minute wheel (for 25j)
☆999611	Indicator wheel spring	011147	Upper hole jewel for transmission wheel
014363	Diashock upper frame	011147	Lower hole jewel for transmission wheel
014364	Diashock lower frame	023150	Tube for pallet cock screw (Cylinder type)
014365	Diashock hole jewel with frame	023151	Tube for bridge screw
011210	Diashock cap jewel	023170	Tube for pallet cock screw (Recessed type)
014317	Diashock spring	023171	Tube for framework screw of automatic device
015421	Diafix upper hole jewel with frame for 3rd wheel	023417	Date corrector pin
015421	Diafix lower hole jewel with frame for 3rd wheel		
015411	Diafix upper hole jewel with frame for escape wheel		
015411	Diafix lower hole jewel with frame for escape wheel		
011206	Diafix cap jewel		
015113	Diafix spring		

☆ ⇨ Please see remarks on the next page.
 As for all other parts not shown here, please refer to the basic calibre (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).

☆ ⇨ Please see remarks on the next page.
 Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre
 (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).

Calibre No. <h1 style="text-align: center;">6106C</h1>	Jewels 23j 25j	Style Name
<small>↳ Basic Calibre 6106A 25J Catalog No. 61-06-1</small>		

Remarks:

Winding stem, Indicator wheel, Indicator wheel spring

☆ 354615 Used for other than models with rotating dial ring.

☆ 357612 }
 ☆ 998613 } Used only for models with rotating dial ring.
 ☆ 999611 }

If the shapes of these three parts are different from the above items, specify ① Cal. No. and ② the case No. when ordering.

Lever for unlocking stem

☆ 397610 Used only for the one-piece waterproof case.

If the lever for unlocking stem is required in any other type, specify the dial No. or the case No.

Date dial

☆ 801610 (Black figures on white background) Used when the crown is located at 4 o'clock and the date frame at 3 o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

Day star with dial disk

☆ 870558 (English ↔ Spanish) Used when the crown is located at 4 o'clock and the day frame at 3 o'clock.

When ordering any other type of the day star with dial disks, clearly mention the number printed on the disk. If the number is unknown, specify ① Cal. No. ② the crown position ③ the day frame position ④ the dial No. and ⑤ the national language.

Holding ring for dial Measure the total thickness and the outside diameter -----

☆ 884611 1.82 mm total thickness and 29.1 ϕ mm outside diameter.

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.



Cal. 6106C

Characteristics

Casing diameter: 27.00 ϕ mm
 Maximum height: 5.15 mm
 Vibrations per hour: 21,600
 Automatic winding with sweep second
 Calendar (day & date)
 Instant setting device for day & date calendar
 Bilingual change-over system for day of week
 Second-setting device
 "Diashock" Shock Resistant Device




112619 171619 345612 387613 ☆357612 ☆998613 ☆999611 193534



500620 823619 556611 802611 808611 810611 868611 ☆870558



880611 972610

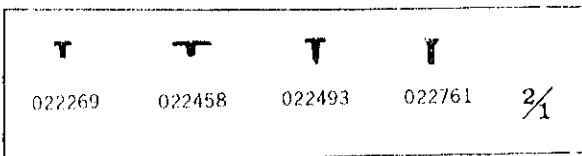

022269 022458 022493 022761 2/1

Calibre No. 6106C		Jewels 17j	Style Name	
⇒ Basic Calibre 6106A 25J Catalog No. 61-06-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
112619	Barrel & train-wheel bridge	☆801610	Date dial	
122611	Center wheel bridge	802611	Date driving wheel	
161805	Pallet cock	808611	Date dial guard	
171619	Balance cock	810611	Date jumper	
193534	Framework for automatic device with ball-bearing	817610	Intermediate date wheel	
205613	Complete barrel with arbor	868611	Day finger	
213612	Barrel arbor	☆ 870558	Day star with dial disk (English ↔ Spanish)	
224611	Center wheel & pinion with cannon pinion	880611	Date corrector	
225611	Cannon pinion	883610	Date corrector spring	
231610	Third wheel & pinion	☆884611	Holding ring for dial	
241611	Sweep second wheel & pinion	963610	Snap for day star with dial disk	
251611	Escape wheel & pinion	972610	Day-date corrector finger	
261611	Minute wheel	022150	Stud screw	
271611	Hour wheel	022252	Holder screw for transmission wheel & pawl lever	
281611	Setting wheel	022257	Date corrector spring screw	
282611	Clutch wheel	022269	Minute wheel bridge screw (Cheese-head screw)	
285611	Ratchet wheel	022351	Center wheel bridge screw	
301611	Jewelled pallet fork & staff	022458	Screw for oscillating weight	
310611	Balance complete with stud	022467	Ratchet wheel screw	
315611	Balance staff	022468	Pallet cock screw	
331610	Roller with jewel	022470	Framework screw for automatic device with ball-bearing	
341611	Regulator	022471	Click screw	
345612	Stud holder	022477	Bridge screw	
354615	Winding stem	022662	Setting lever spring screw	
☆ 357612		022677	Screw for day & date driving wheel	
381611	Click	022760	Minute wheel bridge screw (Chamfer-head screw)	
383611	Setting lever with axle	022760	Date dial guard screw	
384611	Yoke (Clutch lever)	022761	Dial screw	
387613	Minute wheel bridge	011145	Upper hole jewel for center wheel	
388611	Setting lever spring	011146	Lower hole jewel for center wheel	
391610	Second-setting lever	011306	Lower hole jewel for 3rd wheel	
☆397610	Lever for unlocking stem	011406	Upper hole jewel for escape wheel	
401615	Mainspring with slipping attachment	011406	Lower hole jewel for escape wheel	
☆ 998613	Indicator wheel	011503	Upper hole jewel for pallet	
☆ 999611	Indicator wheel spring	011503	Lower hole jewel for pallet	
014363	Diashock upper frame	011147	Upper hole jewel for transmission wheel	
014364	Diashock lower frame	011147	Lower hole jewel for transmission wheel	
014365	Diashock hole jewel with frame	023150	Tube for pallet cock screw (Cylinder type)	
011210	Diashock cap jewel	023151	Tube for bridge screw	
014317	Diashock spring	023170	Tube for pallet cock screw (Recessed type)	
500620	Oscillating weight	023171	Tube for framework screw of automatic device	
505611	Transmission wheel	023417	Date corrector pin	
823619	Eccentric post			
831611	Pawl lever with jewel			
839610	Holder for transmission wheel & pawl lever			
556611	Date finger			

Remarks:

☆ 357612 (Winding stem)
 ☆ 998613 (Indicator wheel)
 ☆ 999611 (Indicator wheel spring) } These parts are available only for watches with rotating dial ring.
 ☆ 397610 (Lever for unlocking stem) Used only for the one-piece waterproof case.
 ☆ 801610 (Date dial — Black figures on white background) Used when the crown is located at 4 o'clock and the date frame at 3 o'clock.
 If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.
 ☆ 870558 (Day star with dial disk, English ↔ Spanish) Used when the crown is located at 4 o'clock and the day frame at 3 o'clock.
 When ordering any other type of the day star with dial disks, clearly mention the number printed on the disk. If the number is unknown, specify ① Cal. No. ② the crown position ③ the day frame position ④ the dial No. and ⑤ the national language.
 ☆ 884611 (Holding ring for dial) 1.8mm total thickness and 29.1 ϕ mm outside diameter.
 If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

☆ ⇨ Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre

(Cal. No. **6106A** 25J Catalog No. 61-06-1 Green page).

☆ ⇨ Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre

(Cal. No. **6106A** 25J Catalog No. 61-06-1 Green page).