



Mouvement ligne quartz | Quartz line movement

Calibre SOP 656



Caractéristiques principales

Mouvement quartz:	Fabrication Suisse
Fabricant:	SOPROD SA
Référence:	SOP 656
Calibre:	5 1/2'''
Diamètre d'encadrement (mm):	15.55 x 13.00
Hauteur du mouvement (mm):	2.2
Hauteur de tige (mm):	0.78
Affichage:	2 aiguilles H/M au centre
Quantième à guichet:	Non disponible
Positions de tige / poussoir:	1) Tige à 2 positions 2) Mise à l'heure + stop moteur
Nombre de rubis:	4
Fixation du cadran:	Par pinces
Consommation:	U= 1.55V - 0.44 µA
Résistance aux chocs:	NIHS 91-10
Autonomie théorique:	36 mois
Options:	
- Finitions à choix Nickelage, dorage, rhodiage	
- Décors à choix Microbillé, adouci, colimaçonné papier, colimaçonné diamant, perlage, côtes de Genève, côtes circulaires, biseau diamanté	

Main features



Quartz movement:	Swiss Made
Manufacturer:	SOPROD SA
Reference:	SOP 656
Calibre:	5 1/2'''
Casing-diameter (mm):	15.55 x 13.00
Height on movement (mm):	2.2
Height of stem (mm):	0.78
Display:	2 hands H/M on the middle
Date display in window:	Not available
Stem positions / push button:	1) Stem of 2 positions 2) Time setting + stop motor
Number of jewels:	4
Dial fixing:	By claws
Power consumption:	U= 1.55V - 0.44 µA
Shock resistance:	NIHS 91-10
Theoretical autonomy:	36 months
Optionals:	
- Finishing on choice Nickel-plating, gilding, rhodium-plating	
- Decoration on choice Shot-blasted, smoothed, snailed paper, snailed diamond, circular graining, Geneva stripes, circular stripes, bevel diamond	






Cage pour boîte

Frame for case

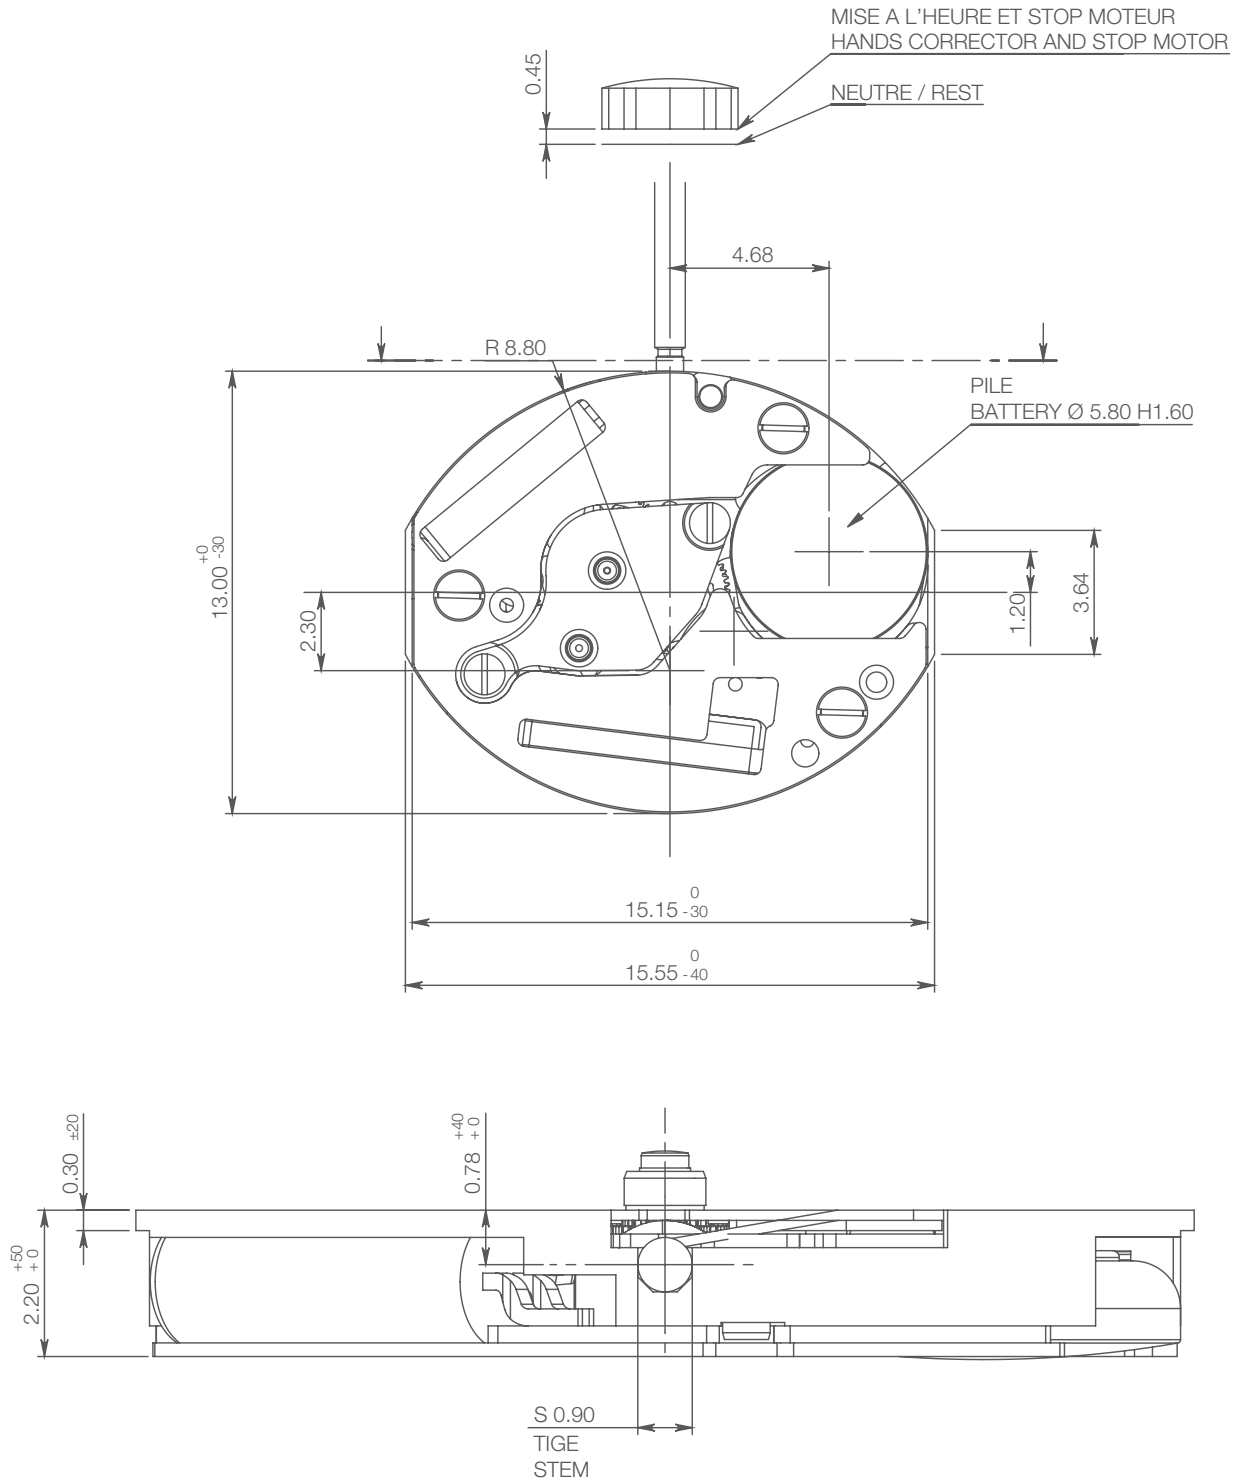

Aiguillage

Hand fitting

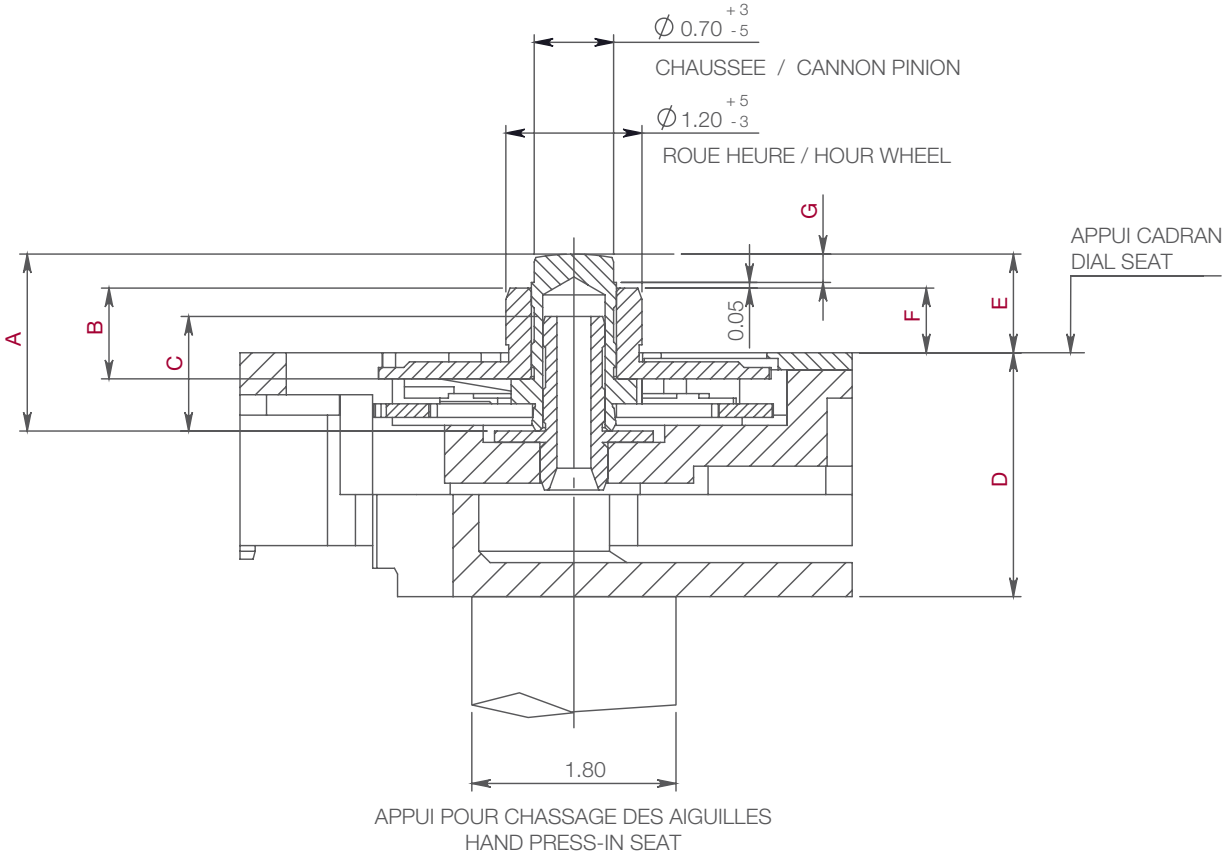

Aiguille minute:
Balourd $\leq 0.35 \mu\text{Nm}$ – Masse $\leq 10 \text{ mg}$
Force de chasse des aiguilles: $\leq 20 \text{ N}$

Minute hand:
Unbalance $\leq 0.35 \mu\text{Nm}$ – Mass $\leq 10 \text{ mg}$
The hand press-in force: $\leq 20 \text{ N}$

Hauteur aiguillage	Longueur				Lenght				Dépassement				Height over dial seat				Hauteur max. sur cadran
	A		B		C		D		E		F		G				
	Chaussée	Cannon pinion	Roue heures	Hour wheel	Tube de centre	Center tube	Tube de centre	Center tube	Chaussée	Cannon pinion	Roue heures	Hour wheel					
Hand fitting height															Thickness max. dial		
H0 (réduit / shortened)	1.56		0.80		1.01		2.15		0.90		0.60		0.25		0.30		
H1	1.91		1.05		1.01		2.15		1.25		0.85		0.35		0.55		
H2	2.16		1.30		1.01		2.15		1.50		1.10		0.35		0.80		
H3	2.41		1.55		1.01		2.15		1.75		1.35		0.35		1.05		





Indications pour cadran




Indication for dial

ATTENTION!

Les tolérances des pieds de cadran doivent être respectées.

WARNING!

Dial feet tolerances must be respected.

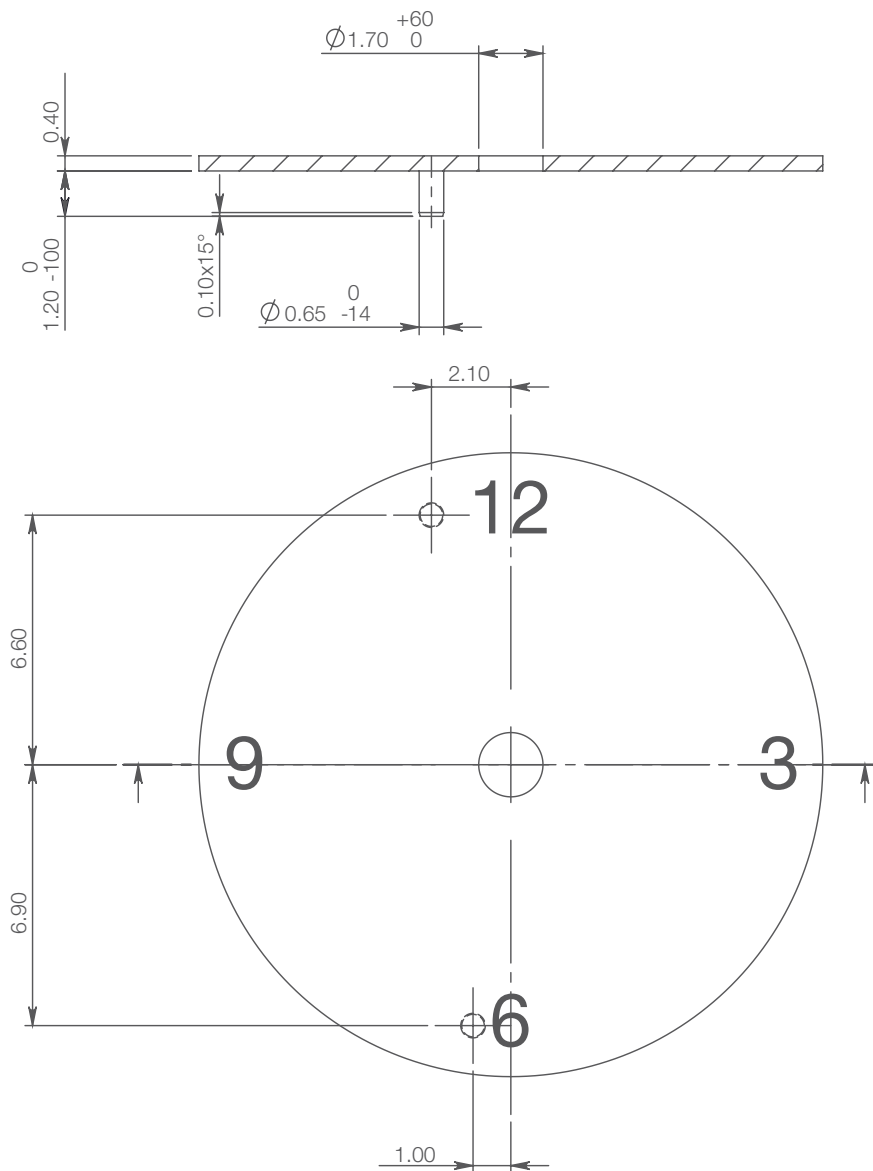

Affichage disponible

Display available

